


RXHB 超薄型金属外壳线绕

RXHB Thin Metal Housing Wire Wound Resistors 30–50W

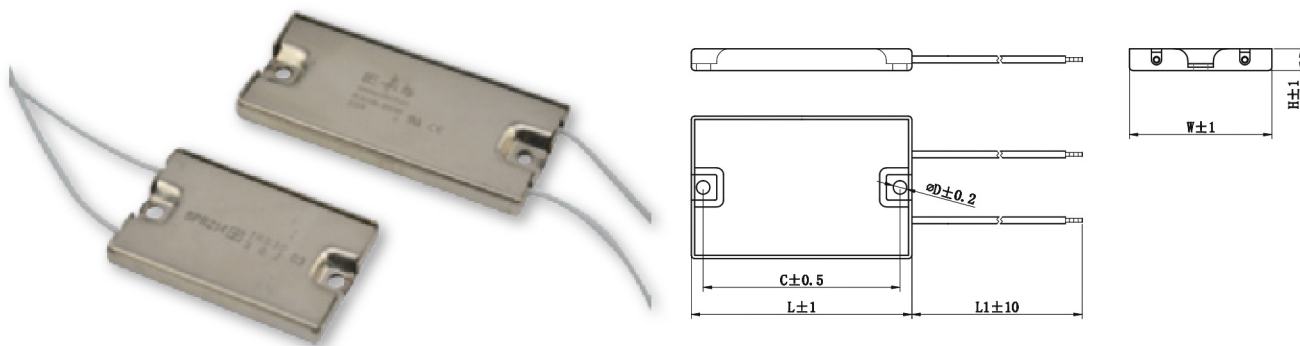

产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 高过载能力
High over loading ability
- 符合欧盟 ROHS 标准
ROHS compliant
- 外形美观、易于安装
Attractive appearance and easy installation

应用范围 Applications

- 电力分配，负荷测试
Electric power distribution, load test
- 适用于功率电源 / 变频电源等领域
Ideal for functional power supply / Inverter power supply etc
- 用于工控的伺服系统中软启动和制动部分
Applied to the soft starting and braking parts of industrial controlled servo drive system

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)					
				L	W	H	C	D	L1
RXHB	30	1R ~ 1KR	± 5% (J) ± 10% (K)	65	42	6	57	5.0	可定制
	50	1R ~ 1KR		90	42	6	78	5.0	

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RXHB	30W	20R	± 5%