


铝外壳线绕电阻器 Aluminum Housing

RXFB-4/4B 薄型铝外壳线绕

RXFB-4/4B thin Aluminum Housing Wire Wound Resistors 40W-150W

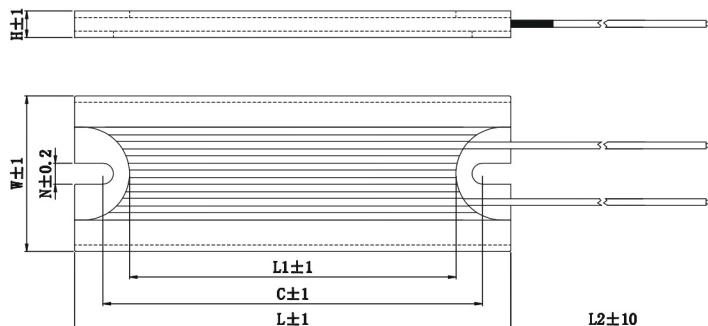

产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 高过载能力
High over loading ability
- 符合欧盟 ROHS 标准
ROHS compliant
- 外形美观、易于安装
Attractive appearance and easy installation

应用范围 Applications

- 电力分配，负荷测试
Electric power distribution, load test
- 适用于功率电源 / 变频电源等领域
Ideal for functional power supply / Inverter power supply etc
- 用于工控的伺服系统中软启动和制动部分
Applied to the soft starting and braking parts of industrial controlled servo drive system

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)						
				L	W	H	C	N	L2	L1
RXFB-4	40	1R ~ 1KR	±5% (J) ±10% (K)	61	26	7	55	3.5	可定制	47
	60	1R ~ 1KR		72.5	27.5	11	65	3.5		59.5
	100	1R ~ 1KR		100	27.5	11	86.5	3.5		80
RXFB-4B	60	1R ~ 1KR		115	41	7	100	4.5		86
	80	1R ~ 1KR		140			125	4.5		111
	100	1R ~ 1KR		165			150	4.5		140
	120	1R ~ 1KR		190			175	4.5		165
	150	1R ~ 1KR		215			200	4.5		190

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RXFB-4	100W	50R	±5%