


铝外壳线绕电阻器 Aluminum Housing

RXFG 型铝外壳线绕电阻器

RXFG Aluminum Housing Wire Wound Resistors 1200W-6000W

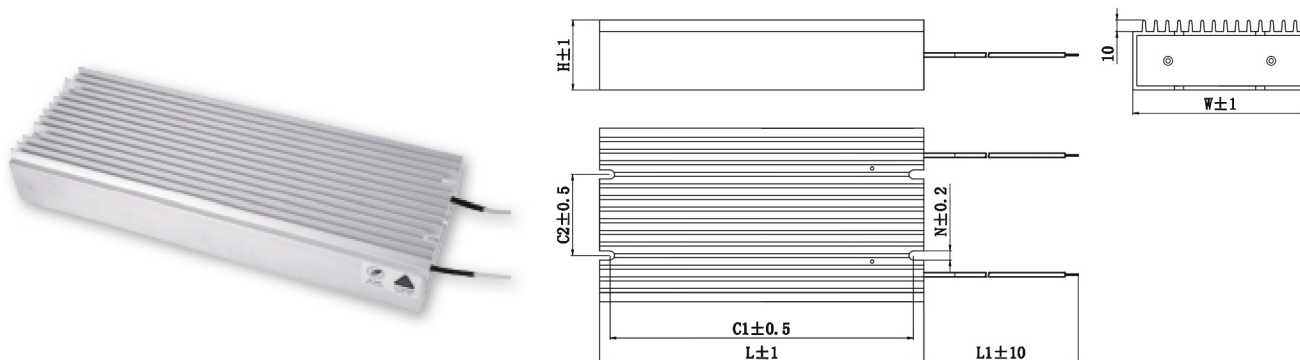

产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 高过载能力
High over loading ability
- 符合欧盟 ROHS 标准
ROHS compliant
- 外形美观、易于安装
Attractive appearance and easy installation

应用范围 Applications

- 电力分配，负荷测试
Electric power distribution, load test
- 适用于功率电源 / 变频电源等领域
Ideal for functional power supply / Inverter power supply etc
- 用于工控的伺服系统中软启动和制动部分
Applied to the soft starting and braking parts of industrial controlled servo drive system

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range	阻值精度 Tolerances Range	外形尺寸 Dimensions (mm)							净重量 Net weight (KG)
				L	W	H	C1	C2	N	L1	
RXFG	1200	1R ~ 1KR	±5% (J) ±10% (K)	250	150	61	237	70	6.5	可定制	3.5
	1500	1R ~ 1KR		280			267	70	6.5		4.0
	2000	1R ~ 1KR		310			297	70	6.5		4.4
	2500	1R ~ 1KR		350			337	70	8.0		4.9
	3000	1R ~ 1KR		400			387	70	8.0		5.6
	4000	1R ~ 1KR		500			487	70	8.0		7.0
	5000	1R ~ 1KR		600			587	70	8.0		8.5
	6000	1R ~ 1KR		700			687	70	8.0		10.2

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RXFG	1200W	50R	± 5%