


RX27-1/RY27-1 型卧式瓷壳线

RX27-1/RY27-1 Porcelain Housing Wire Wound Resistors 2-20W

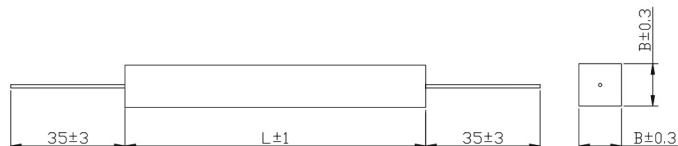

产品特点 Features

- 高温负荷特性优良
Excellent high temperature load performance
- 可提供安装套件（选购件）
Assembly and fittings (available)
- 高过载能力
High over loading ability

应用范围 Applications

- 电力分配，负荷测试
Electric power distribution, load test
- 用于电源等回路的限流、均流或取样检测
Applied for current limited current balance or sampling for testing
- 适用于功率电源
Ideal for functional power supply
- 变频电源等领域
Inverter power supply etc

主要性能技术指标 Main specification

型号 Type	功率 Power (W)	阻值范围 Resistance Range		外形尺寸 Dimensions (mm)						
		RX27-1	RY27-1	L	B	RM	C1	C2	C3	C4
RX27-1/ RY27-1	2.0	1R ~ 390R	390R ~ 100K	17.5	6.5	-	-	-	-	-
	3.0	R1 ~ 680R	680R ~ 100K	22.0	8.0	-	-	-	-	-
	5.0	R1 ~ 680R	680R ~ 100K	22.0	9.5	-	-	-	-	-
	7.0	R1 ~ 1K5	1K0 ~ 100K	35.0	9.5	47.0	5.0	11	1.5	4.0
	10.0	R1 ~ 2K4	1K0 ~ 100K	48.0	9.5	60.0	5.0	11	1.5	4.0
	15.0	R1 ~ 9K1	1K0 ~ 100K	48.0	12.5	61.0	6.5	14	2.5	4.5
	20.0	R1 ~ 12K	1K0 ~ 100K	63.5	12.5	77.0	6.5	14	2.5	4.5

订货示例 How to order

产品型号 Type	功率 Power	标称阻值 Nominal value	精度 Tolerance
RX27-1/RY27-1	8W	51R	± 5%